



Installation instructions for slides with lower skirting & T molding extending below the floor line.

Note: Mini Drip Edge & cut out near rubber seal is not required for this style.

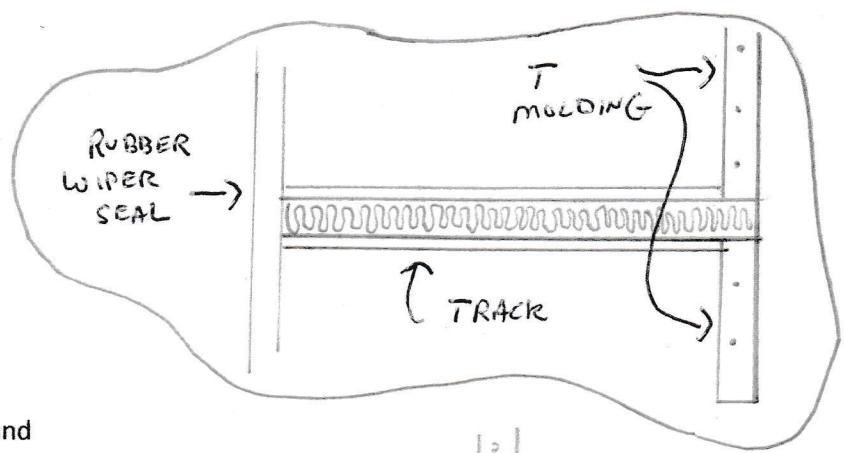


- 1) Pre-seal as needed w/ quality clear sealant around any voids (cracks/spaces) in the area, and around end of track and T molding. **Do not use a silicone product**, as the two sided tape or other sealants will not stick to silicone! Smooth flat w/ finger.

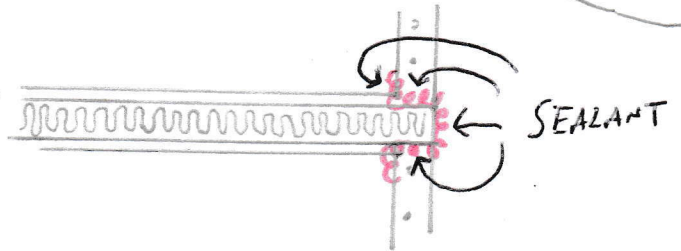


- 2) Determine the correct length of your main Drip Edge & trim as needed. Measure complete opening the product is to cover & add an additional 7/8 inch of material to stick in past rubber seal. You can always leave a little extra on & trim off towards the opposite end afterwards. TIP: Using the back side of the Velcro tape strip (paper backing), this can be used as a more flexible measuring device to get a more accurate measurement. You can push it back 7/8" past the seal, hold tightly up along lower edge of track, and right up to the opposite corner towards the T molding before marking off. Then use a measuring tape to measure where you marked it off.

- 3) Apply the Hook portion of the Velcro tape to the lower track. First wipe down & clean entire lower track with rubbing alcohol let dry. Start installing the tape about 3/4" in past the bulb seal / rubber wiper seal & work your way down slowly to the end of the track, (pushing in & attaching close to the upper section of the lower track. You don't want the Velcro tape wrapping around the lower track facing the ground.

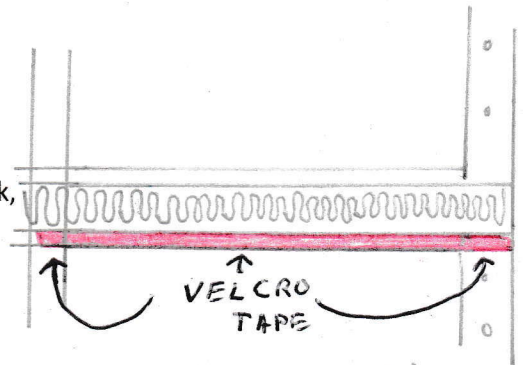

- 4) You can now line up the main Drip Edge to the installed Velcro starting with pushing in past bulb/ wiper seal (towards the RV), and working way to the opposite end of the track, towards the T molding. Take your time lining it up as you don't want to pull it off and re-set it the first time. **Let this stay on for 72 hours to allow the adhesive in the Velcro tape to fully bond to the lower track. Pulling off sooner, could result in the Velcro tape failing.**

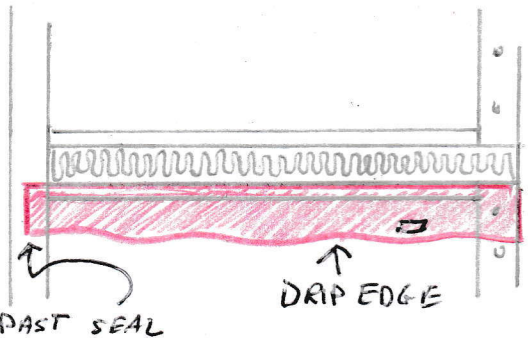

- 5) Draw a small chart on paper & number the back sides of the Drip Edges (with permanent marker), so you know what slides & what sides they go to, for making future placements simple. **Remember to remove the Drip Edges before bringing your slides in!!** To remove Drip Edge, simply start with either side, and pull forward towards you a little bit at a time, working your way down. It will separate/ tear off nicely.

