


Installation instructions for 3-part Drip Edge, **WITH lower skirting** & T molding extending below the floor line.

Note: In most cases, the Mini Drip Edge & cut out near wiper seal is not needed for this style.

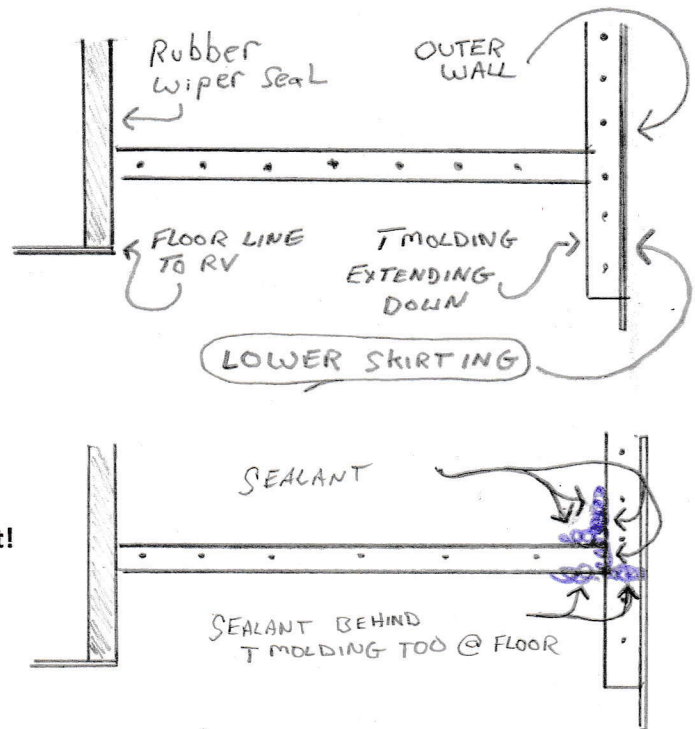


- 1) **Pre-seal** as needed w/ quality clear sealant around any voids (cracks/ spaces) in the area: including end portions of the lower molding strip, & spaces around & under the outer corner floor area. **Do not use a silicone product!** As other tapes & sealants will not stick to silicone. Any previous silicone that was used in the areas working on would need to be fully removed.

2) **Install Mini Drip Edge / If needed...**


Note: Slide rooms with 1.5" wide T molding extended down past the floor line may not require a Mini Drip Edge. However, if you would like to still install one for one reason or another, follow those instructions found on the "installation instructions for 3-part Drip Edge, with no lower skirting page."

- 3) **Trim Drip Edge sections** to the correct length needed. The top (Smaller fixed section) will start pushed up against the wiper flap, & go right up to the edge of the opposite end (T molding). The larger removable section will be proximately 7/8" longer, as the extended section will go in past the wiper seal towards RV.

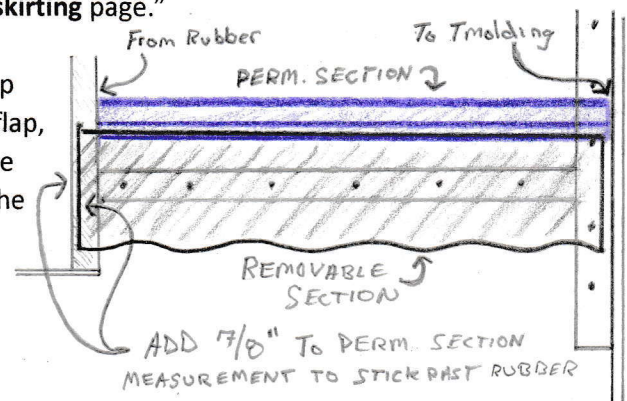


4) **Install smaller fixed permanent section of Drip Edge.**


Note: If any screw heads are in the way, its best to remove & replace with a flat head, counter sunk style, which will eliminate most of the height of the screw head sticking outward. Apply sealant first before putting new screw in place.

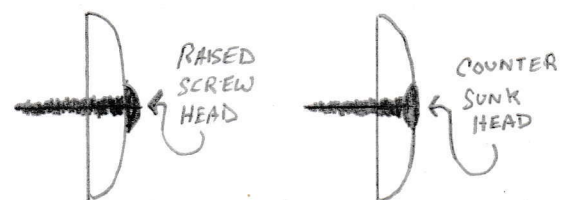


- a) Attach both sections together via hook & loop, with the smaller on the top and larger on the bottom. Hold up against side wall of slide room to **determine** best mounting locations & drop. Use level (tool), mark off across top with few sections of painter's tape to use as your installation guide for the next step. *The goal is to have the larger section hang down **past** the Mini Drip Edge (if using one), or a few inches below the floor line. If your RV has a lower molding strip that's above the Floor, you would want to mount this above that strip by approx. 1" inch. The bottom of this permanent section*

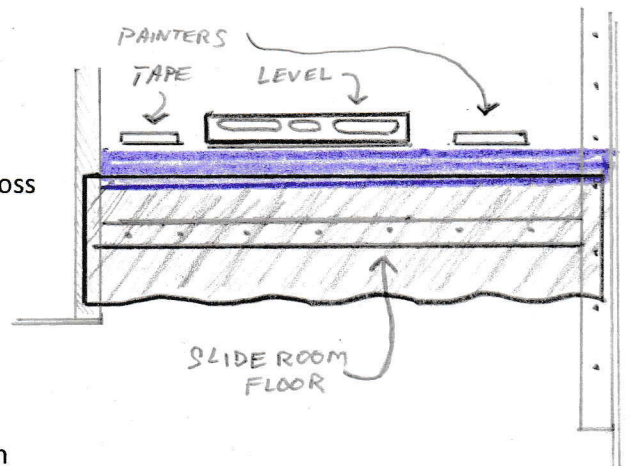


can be as low as the bottom of the slide floor. You don't want it sticking down past the slide room floor. "For cable drawn slide rooms; this may be common to mount the fixed portion very close to the bottom of the floor in order to clear the mounted cable hardware.

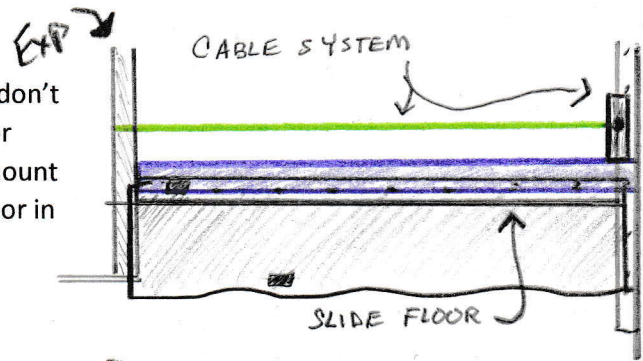


- b) Clean off area below the taped line where the fixed section will be attached to w/ rubbing alcohol & let dry. Separate the two parts, keeping the smaller section, pull backing off the VHB tape a little at a time, start attaching right up against the rubber wiper seal, and work your way down slowly towards the T molding, following your straight painters tape line. Push down w/ pressure & rub down along all the top Portions of the permanent section that's just installed. Remove painters' tape that's above.

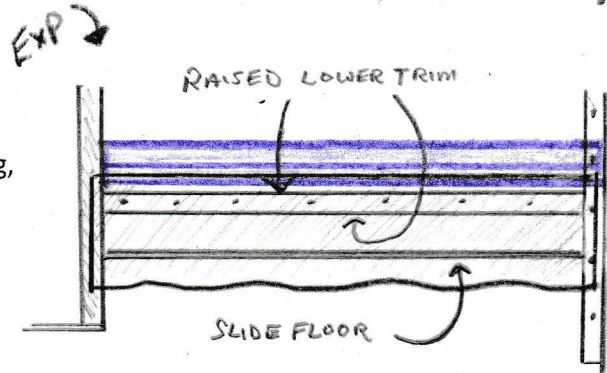

- c) You will most likely have a small bridge gap to fill that would be the transition from the T molding trim & the side wall. Use the supplied butyl tape, by pushing in to fill all visible portions of gap, then smooth over, trimming off any extra.

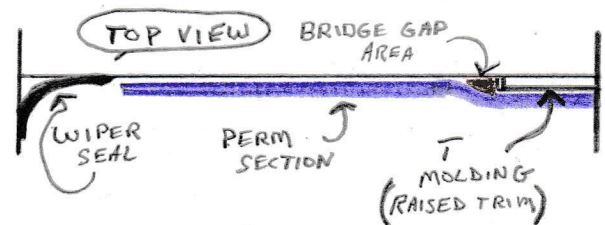


- d) Use same clear sealant again (not silicone), apply a small bead all the way across top ledge of mounted section, smooth over forming an angled/ curved ledge. Note: You can put down painter's tape spaced approx. 3/16th inch above the permanent section before applying sealant to give you a clean caulk line. Simply apply tape, then sealant & run your finger down to smooth, and then immediately (slowly) pull the painters tape backup. (You don't want a skin to form before pulling up). Allow sealant to fully dry.

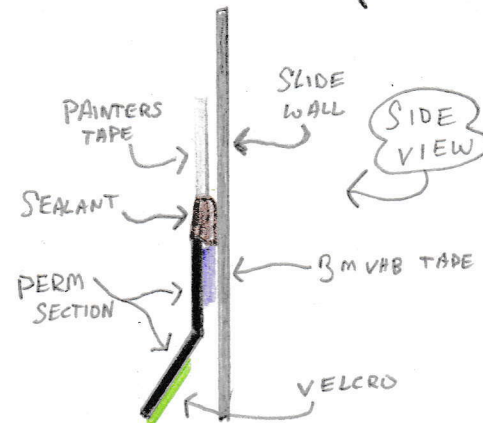

- 5) **Trim rubber wiper side of Drip Edge** (larger removable section); this will allow your Drip Edge to go past(behind) the rubber wiper seal. A small angled cut out is needed to allow this to happen. **IF NEEDED**

NOTE: In most cases, this step is not required/ needed b/c this section only sticks past the wiper seal about 7/8" or less. However if you still find that trimming is needed, follow those instructions found on the "installation instructions for 3-part Drip Edge, **with no lower skirting page.**"

- 6) **Line up & install the larger section** of the Drip edge into the smaller permanent section via hook & loop (Velcro). Start with the side going past the wiper seal area & work way down towards the T molding, pushing it up in place. **Take your time lining it up the first time, as you can't remove & reposition this section for the first 72 hours, this is the amount of time needed for the VHB tape to bond properly that's in the smaller permanent**

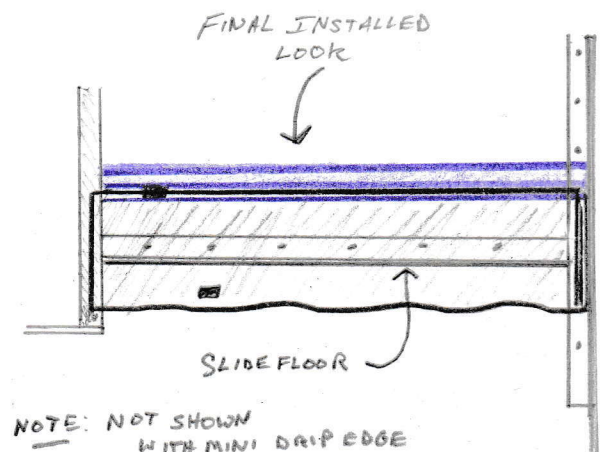

NOTE: NOT SHOWN WITH MINI DRIP EDGE

section. Pulling on this to soon could result in the permanent section to become loose or sealant applied to top to shift.

- 7) Draw a small chart on paper & number the back sides of the Drip Edge part (with black permanent marker), so you know what slides & what sides they go on, for making future Placements simple. **Remember to remove the larger portion of the Drip Edge before bringing In your slides!!!** The smaller permanent section & Mini Drip Edge sections both stay on. To remove the larger section, simply start with either side, and pull forward towards you a little bit at a time, working your way down. It will separate and tear off nicely. The product will flex while doing this, which is normal.